

120W/12V Industrial DIN Rail Power Supply (GWS-DP120-12)



Features



- Power Input: AC90~264V
- Support production for short circuit/over current/over voltage
- Wide operating ambient temp (-40°C~70°C)
- 100% full load aging test
- High efficiency, long life time and high reliability
- No fan, completely tranquil work

Application

- Industrial Control System
- Semiconductor fabrication equipment
- Factory automation
- Electro-mechanical apparatus

Description

GWS-DP120-12 is one economical slim 120W industrial DIN Rail power supply series, adapting to be installed on TS-35/7.5 or TS-35/15 mounting rails. The entire series adopts the full range AC input from 90VAC to 264VAC and conforms to EN61000-3-2, the norm the European Union regulates for harmonic current.


GWS-DP120-12 is designed with metal housing that enhances the unit's power dissipation. With working efficiency up to 90%, the entire series can operate at the ambient temperature between -40°C to 70°C under air convection. It is equipped with constant current mode for over load protection, fitting various inductive or capacitive applications. The complete protection functions and relevant certificates for industrial control apparatus make GWS-DP120-12 a very competitive power supply solution for industrial applications.

Technical Specification


| | | | |
|--------------------------------|------------------------------------|---------------|---|
| Model | | GWS-DP120-12 | |
| Output | Group Of Output | | 1 |
| | DC Voltage | | 12VDC |
| | Default Output Voltage | | 0-10A |
| | Ripple Noise | 0< Ta≤55℃ | ≤50mVp-p |
| | | -15≤Ta≤0℃ | ≤100mVp-p |
| | Stabilized Voltage Precision | | ±1% |
| | Line Regulation | | ±1% |
| | Load Regulation | | ±1% |
| | Temperature Coefficient | | ±0.03%/℃ |
| | Output Start Time | | ≤3.0S (120Vac input, Full load); ≤2.0S (220Vac input, Full load) |
| | Output Hold Time | | ≥10mS(120Vac input, Full load); ≥20mS(220Vac input, Full load) |
| Voltage Overshoot | | <5.0% | |
| Input | Input Voltage Range | | 90VAC~264VAC |
| | Input Rated Voltage Range | | 100VAC~240VAC |
| | Frequency Range | | 47Hz~63Hz |
| | Efficiency | | 90% |
| | Input Current | | <1A |
| | Inrush Starting Current | | <40A@300Vac Cold start; |
| | Leakage Current | | input to output less than 0.25mA |
| Protection | Output | Over Power | 144~180W Swing machine (Testing method: Increase the output current until enabling the protection. Protection mode:Swing machine, Self-recovery after over-power released.) |
| | | Over Voltage | 15-16V Swing machine (Short circuit the Pin1-2 of U8, swing machine. Output recovery to normal after removing the short circuit) Note: Do not use external voltage. |
| | | Over Current | 12~15A Swing machine (Testing method: Increase the output current until enabling the protection. Protection mode:Swing machine, Self-recovery after over-current released.) |
| | | Short Circuit | It can be short circuited for a long time and automatically recover after the short circuit is eliminated. |
| Operation Environment | Operation Temperature And Humidity | | -40℃~70℃; 20%~90%RH No condensing |
| | Storage Temperature And Humidity | | -40℃~85℃; 5%~95%RH No condensing |
| Safety And EMC Standard | Security Standard | | GB4943/EN60950 |
| | Dielectric Strength | | Input—Output:3KVac/10mA; Input--Case:1.5KVac/10mA; Output---Case:0.5KVDC/10mA Time for each testing is 1min. |
| | Insulation Resistance | | Input-Output: 100M ohms; Input-Case: 100M ohms; Output-Case: 100M ohms; |
| | Electromagnetic Interference | | EN55022 Class A |
| | Harmonic Current | | IEC61000-3-2 class A equipment requirements |
| | Electromagnetic interference | | EN61000-4-2,4,5,6,8,11 ENV50204, class A heavy industry standard |

| | | |
|---------------|---|---|
| | Immunity | |
| Others | Design MTBF | 100,000Hrs AT 25°C, MIL-217 Method 2 Components Stress Method |
| | Product size(L*W*H) | 135*121*40mm |
| Notes | <p>If the specification is not specified, all specifications and parameters shall be measured at rated input, rated load and 25 C ambient temperature.</p> <p>Ripple noise test method: the use of a 12# twisted pair, while the terminal to parallel capacitance of 0.1uF and 10uF, measured at the scope of the oscilloscope 20MHz bandwidth.</p> <p>The power supply will be installed on the final equipment as a component, and the final equipment will still have to meet the EMC condition.</p> | |


Dimension

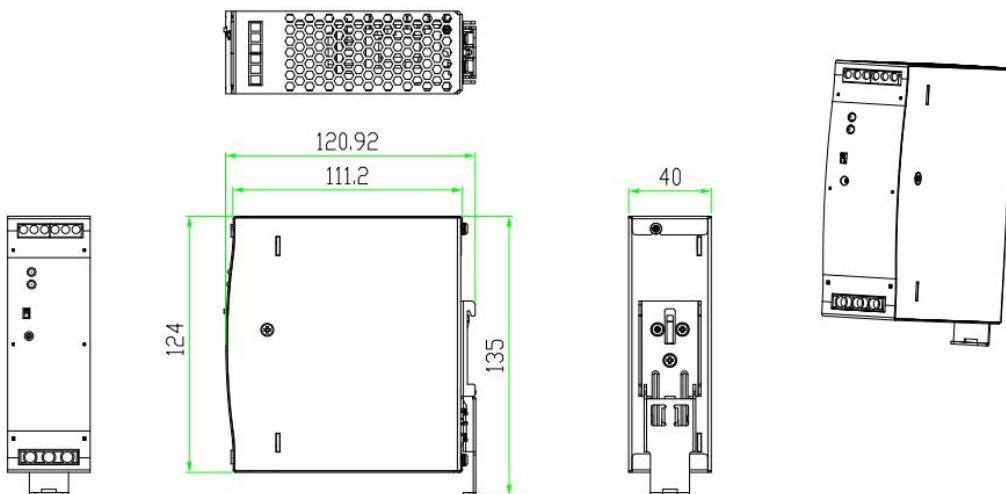


Block Diagram

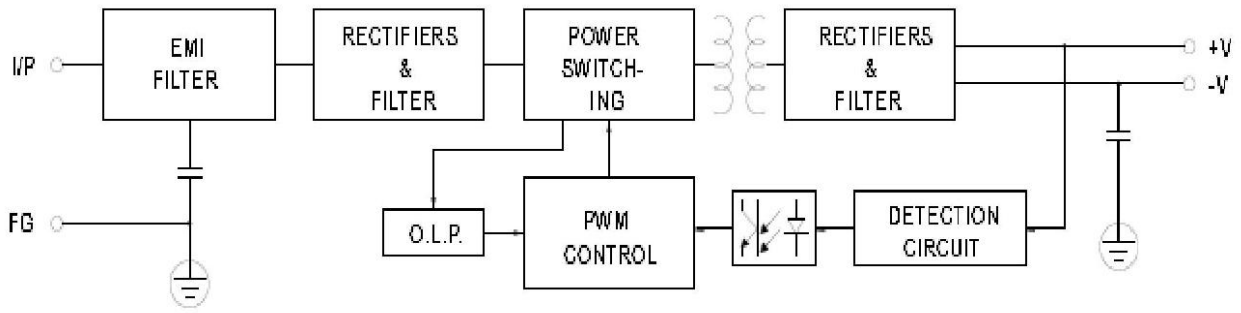

Derating Curve

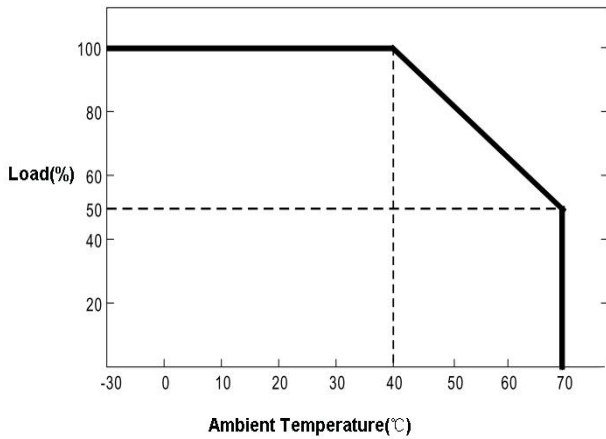

Static Characteristic Curve

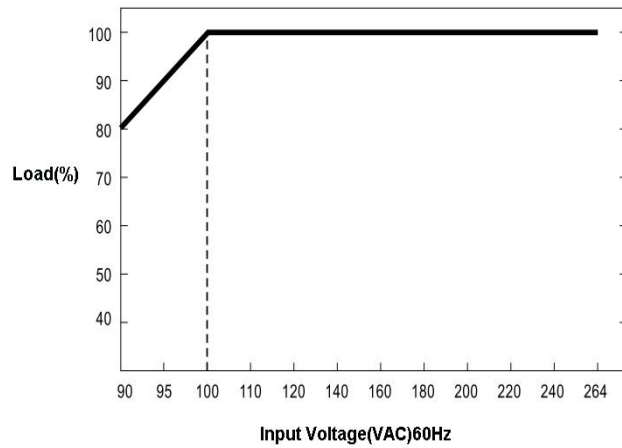

Contact Us



Tel: 0086-755-33376606

Fax: 0086-755-33376608

Email: onv@onv.com.cn

Website: www.gwsdz.com/

Zip: 518000

Headquarter Address: Room 1003, Block D, Terra Building, Futian district, Shenzhen, China

Factory Address: The 4-6th Floor, A building, SenYuTai (Science&Technology) Park, HuaNing Road, Dalang sub-district, Longhua district, Shenzhen, China